



Die VW T5 & VDO Fanpage  
<http://www.jewuwa.de>

Jens Wunderwald

Car Multimedia Systems.




VDO Dayton. The Car Brand


# Anschlußbelegung PC 5000 / PC 5100

# Anschlußbelegung PC 5000 / PC 5100

ISO Kammer A	
Name	Pin No.
Tacho in	1
Direction in	2
Mute out	3
Ubat KL30	4
ACC in	5
Light Switch in	6
Key Switch KL15	7
GND KL31	8

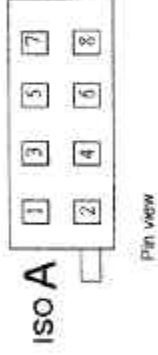

ISO Kammer B	
Name	Pin No.
RC5 in (1)	1
GND RC5	2
RC5 Supply(5V)	3
Res 1	4
Loudspeaker *	5
Loudspeaker -	6
CSB-GP1	7
CSB-GP2	8

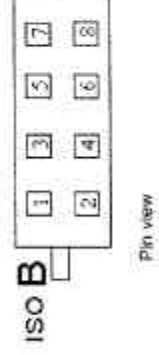


ISO Kammer C1	
Name	Pin No.
D2B+ (1)	1
D2B- (1)	2
GND D2B (1)	3
RC5 in (2)	4
Res2	5
Ubfs	6



ISO Kammer C2	
Name	Pin No.
KeySwitch KL15 (2)	7
Voice-Lo N	8
GND Voice	9
D2B+ (2)	10
GND D2B (2)	11
D2B- (2)	12

Pin view



ISO Kammer C3	
Name	Pin No.
D2B+ (3)	13
D2B- (3)	14
GND	15
Voice-Lo P	16
RxD	17
Res4	18
TxD	19
Res3	20

Pin view

